




**Monitoring Module**  
GSM-A6 550 10 00040

## Radio Monitoring Systems – 550

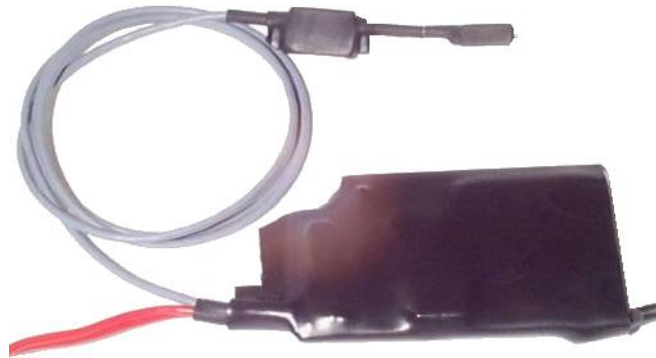

### Monitoring module - GSM-A6

#### General

The GSM-A6 is an especially designed GSM module for voice transmission. It is designed for concealed installation in vehicles and is activated by an internal movement sensor.

In case of installation in vehicles, simply an appropriate positioning of GSM antenna and microphone would be required. Other items are also suitable for installation (e.g. suitcase, container).

Power supply occurs externally.

#### Technical data

GSM module	dual band (900/1800 MHz)
Output power	class 4 (2W @ 900 MHz) class 1 (1W @ 1800 MHz)
Power supply	6 ... 30 V DC
Power consumption (@ 12 V DC)	approx. 112 mA (2W @ 900 MHz)
- operation	approx. 60 mA (1W @ 1800 MHz)
- stand-by	5 mA
Operating conditions:	-20°C up to +55°C
Dimensions:	36 x 8 x 65 mm



If you would like further Information about ELAMAN,  
or would like to discuss a specific requirement or project, please contact us at:

**Elaman GmbH**  
**German Security Solutions**  
**Seitzstr. 23**  
**80538 Munich**  
**Germany**

**Tel: +49-89-24 20 91 80**  
**Fax: +49-89-24 20 91 81**  
**info@elaman.de**  
**www.elaman.de**