



HI-Scan 5030si

# HI-SCAN 5030si

## HEIMANN X-RAY INSPECTION SYSTEM



### Feature Highlights

- Compact desktop solution for mobile and stationary applications
- New X-ray generator plus new sensor technology for high performance

### Optional

- HI-TIP: Threat Image Projection
- Xtrain: Operator training system
- IMS: Electronic image storage and archive
- Xport: Image export in TIF- or JPEG format incl. automatic transmission to PC via Ethernet

HI-SCAN 5030si is the consequent advancement of HI-SCAN 5030, with more than 3000 installations worldwide an extremely successful compact X-ray inspection system.

Planned in modular design as a tabletop system, HI-SCAN 5030si is flexibly extensible and therefore is fit for different applications.

Due to state-of-the-art X-ray-, sensor- and computer-technologies this system offers functionalities, which used to be known from complex solutions for aviation security purposes only.

HI-SCAN 5030si permits configurations with operator training, TIP- and image management functionalities.

Being one of the most space-saving X-ray inspection systems available, HI-SCAN 5030si is ideal for use in mailrooms, entrance halls, correctional and judicial facilities, schools and many other security sensitive areas, where contact-free inspection of pouches, bags, letters or packages is required.

HI-SCAN 5030si - increased security by advanced technology.

## Technical Data **HI-SCAN 5030si**

### General Specifications

Tunnel dimensions	532 (B) x 330 (H) [mm] • 21" (B) x 13" (H)
Max. object size	530 (B) x 320 (H) [mm] • 20.9" (B) x 12.6" (H)
Conveyor height <sup>1)</sup>	approx. 190 mm [7.4"]
Conveyor speed at mains frequency 50 Hz / 60 Hz	approx. 0.18 / 0.22 [m/s]
Max. conveyor load (evenly distributed)	60 kg (132 lbs)
Resolution (wire detectability <sup>3)</sup> )	Standard: 38 AWG (0,13 mm) • typical: 39 AWG (0,10 mm)
Penetration (steel) <sup>3)</sup>	Standard: 10 mm • typical: 12 mm
X-ray dose (typical)	HI-MAT: 1,6 µSv (0,16 mrem)
Film safety	Guaranteed even for high speed films up to ISO 1600 [33 DIN]
Duty cycle	100 %, no warm-up procedure required

### X-ray Generator

Anode voltage • cooling	100 kV cp • hermetically sealed oil bath
Beam direction	diagonal

### Image Generating System

X-ray converter	L-shaped detector line, high resolution
Grey levels stored	4096
Image presentation	S/W, color
Digital video memory	1280 x 1024 / 24 bit
Image evaluation functions	B/W, HIGH, LOW, NEG; incl. Option HI-MAT, additionally VARI-MAT, O <sup>2</sup> , OS electronic zoom: stepless enlargement up to 16-times
Monitor	17" color monitor, low radiation according to MPR II und TCO 99 standards other monitors on request

### Additional Features

Features	Luggage counter, user-id number, display of operating mode, REVIEW-feature to recall previously visible image areas, zoom overview, free programmable keys
Options	HI-TIP, HI-SPOT, SEN, Xport, IMS (Image Management System)

### Installation Data

X-ray leakage	meets all applicable laws and regulations with respect to X-ray emitting devices
CE-labelling	in compliance with 98/37/EWG, 72/23/EWG, 89/336/EWG
Sound pressure level	< 56 dB(A)
Operating- / storage temperature <sup>4)</sup>	0° - 40°C / -20°C - +60°C
Humidity	10% - 90% (non-condensing)
Power supply <sup>5)</sup>	standard: 230 VAC or 110 VAC +10% / -15% • 50 Hz / 60 Hz ± 3 Hz
Power consumption	approx. 0,3 kVA
Protection class system / keyboard	IP 20 / IP 43
Dimensions • Weight <sup>6)</sup>	1200 (L) <sup>2)</sup> x 705 (B) x 726 (H) [mm] • approx. 160 kg 47.3" (L) <sup>2)</sup> x 27.7" (B) x 28.6" (H) • approx. 352 lbs
Mechanical construction	Steel construction with aluminum panels standard color(s): RAL 9006 (white aluminium) / stainless steel

<sup>1)</sup> approx. values (adjustable)


<sup>2)</sup> different length of conveyor and mechanical access protection on request

<sup>3)</sup> Conds.: steel step wedge, CU wires, 0.18 m/s belt speed

<sup>4)</sup> extended temperature range on request

<sup>5)</sup> different values optional

<sup>6)</sup> without control desk, keyboard, monitor(s) etc.

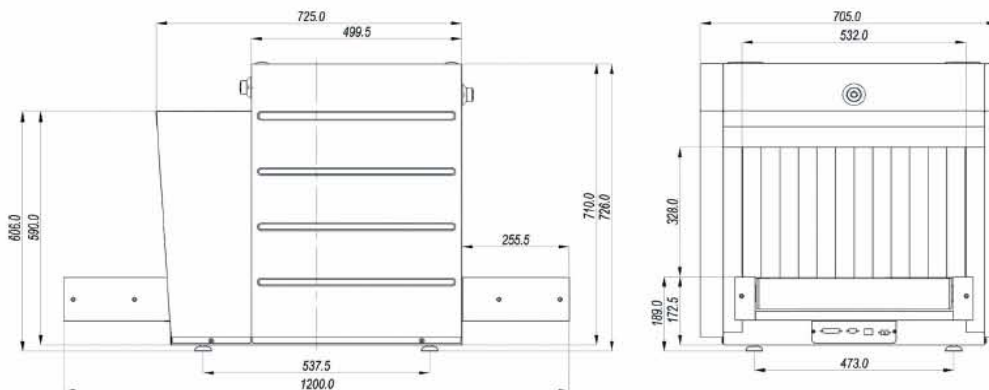



If you would like further Information about ELAMAN,  
or would like to discuss a specific requirement or project, please contact us at:

**Elaman GmbH**  
**German Security Solutions**  
**Seitzstr. 23**  
**80538 Munich**  
**Germany**

**Tel: +49-89-24 20 91 80**  
**Fax: +49-89-24 20 91 81**  
**info@elaman.de**  
**www.elaman.de**